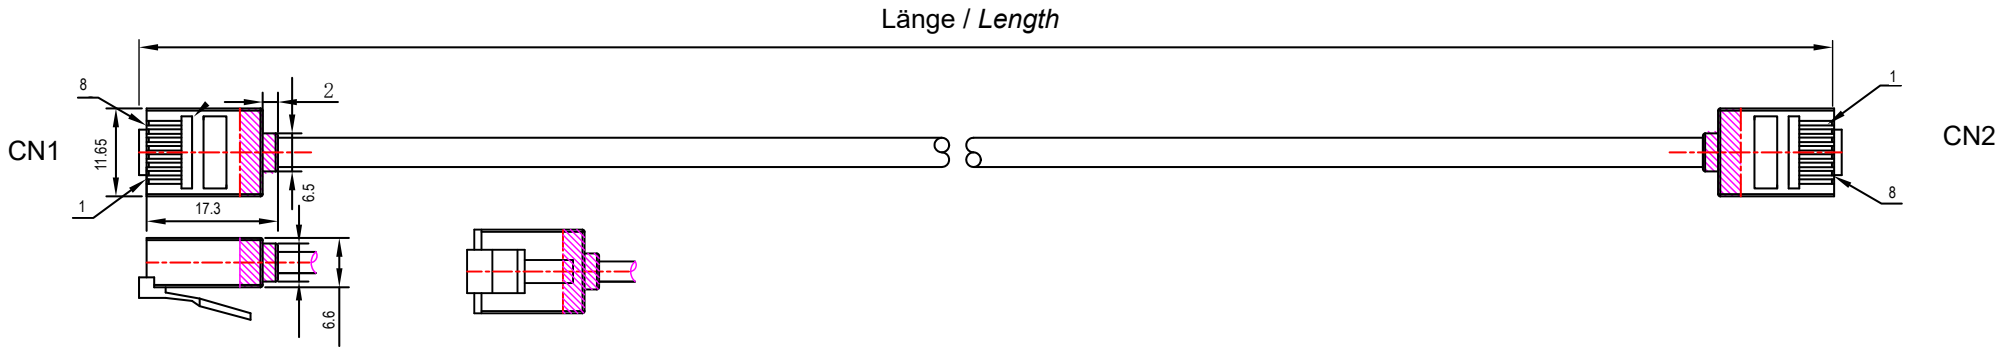

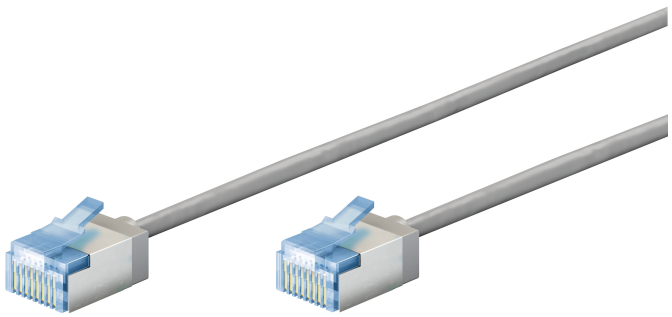

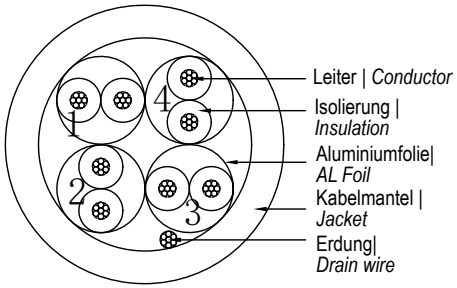

Artikel Nr. | *Item no.*	Beschreibung | *Description*	Länge | *Length*
74304	CAT 6a-0015 U/FTP SLIM LSZH-TPE GRAU 0.15M	150 ± 10 mm
74305	CAT 6a-0025 U/FTP SLIM LSZH-TPE GRAU 0.25M	250 ± 10 mm
74306	CAT 6a-0050 U/FTP SLIM LSZH-TPE GRAU 0.5M	500 ± 20 mm
74307	CAT 6a-0100 U/FTP SLIM LSZH-TPE GRAU 1M	1000 ± 30 mm
74308	CAT 6a-0200 U/FTP SLIM LSZH-TPE GRAU 2M	2000 ± 30 mm
74309	CAT 6a-0300 U/FTP SLIM LSZH-TPE GRAU 3M	3000 ± 50 mm
74310	CAT 6a-0500 U/FTP SLIM LSZH-TPE GRAU 5M	5000 ± 100 mm
74311	CAT 6a-0750 U/FTP SLIM LSZH-TPE GRAU 7.5M	7500 ± 100 mm
74312	CAT 6a-1000 U/FTP SLIM LSZH-TPE GRAU 10M	10000 ± 100 mm
74313	CAT 6a-1500 U/FTP SLIM LSZH-TPE GRAU 15M	15000 ± 150 mm

Verbindungen | *Connections*

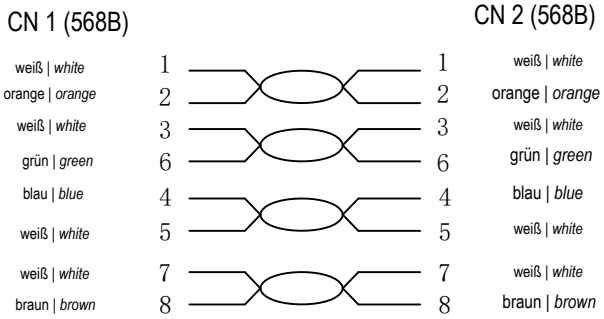

Ultraflexibles CAT 6A Patchkabel, slim, U/FTP, grau

- Superdünnes LAN-Kabel mit extrakurzen RJ45-Steckern für weniger Kabelvolumen im Serverschrank oder Patchpanel und dadurch eine optimierte Luftzirkulation
- Mit Sicherheit flexibel: Ungeschirmt und mit raucharmem, halogenfreiem TPE-Mantel für einen besonders kleinen Biegeradius und hohe Flexibilität

Anschlüsse:	2x RJ45-Stecker (8P8C)
Material Kontakte:	vergoldet
Knickschutz:	beidseitig
Spezifikation:	CAT 6a
Schirmungsklasse:	U/FTP
Max. Bandbreite:	500 MHz
Kabeltyp:	Rundkabel
AWG:	32/7
Material Kabelmantel:	LSZH-TPE
Durchmesser Kabelmantel:	3,8 ± 0.2 mm
Gehäusematerial:	PVC, transparent blau
Rastnasenschutz:	beidseitig
Kontaktierung:	EIA/TIA-568B
Biegeradius:	> 25,4 mm

Ultra-Flexible CAT 6A Patch Cable, Slim, U/FTP, grey

- *Super-thin LAN cable with extra-short RJ45 connectors for a reduced cable volume in the server cabinet or patch panel, resulting in optimised air circulation*
- *Safe and flexible: Unshielded and with a low-smoke, halogen-free TPE jacket for a particularly small bending radius and high flexibility*

Connections:	*2x RJ45 male (8P8C)*
Contacts:	*gold-plated*
Kink protection:	*both sides*
Specification:	*CAT 6a*
Shielding class:	*U/FTP*
Max. bandwidth:	*500 MHz*
Cable type:	*round cable*
AWG:	*32/7*
Cable sheath material:	*LSZH-TPE*
Cable sheath diameter:	*3.8 ± 0.2 mm*
Housing material:	*PVC, transparent blue*
Latch protection:	*both sides*
Contacting:	*EIA/TIA-568B*
Bending radius:	*> 25.4 mm*

Änderungen			Datum	Name
Datum	Name	gez.:	17.06.2024	ir
		gepr.:	17.06.2024	
		Norm:		
		Änderungen vorbehalten / *Subject to change*		

Bezeichnung: CAT 6a-XXXX U/FTP SLIM LSZH-TPE GRAU XXXM

Zeichnungs-Nr.: 74304ff

Blatt 1 von 1