
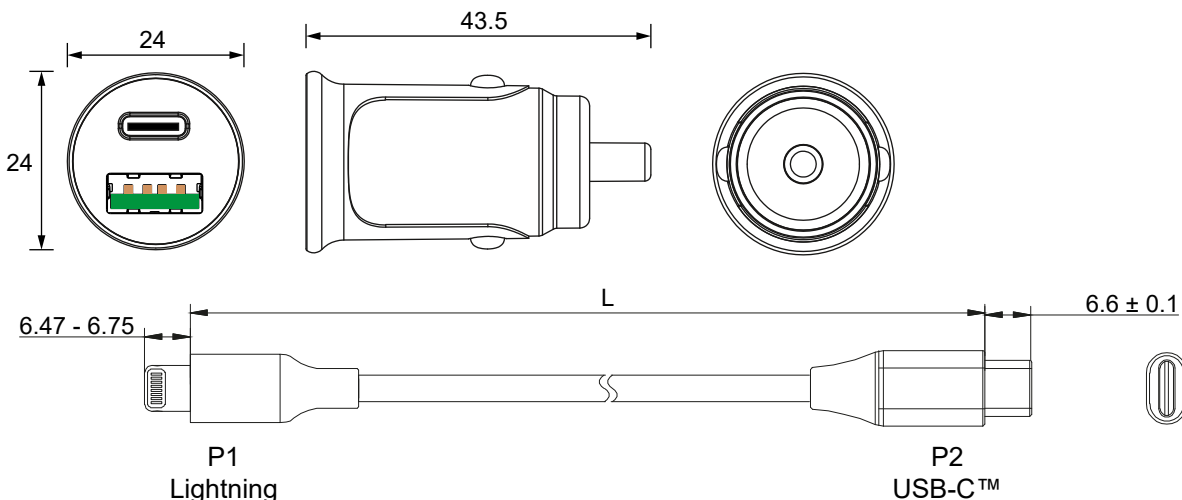
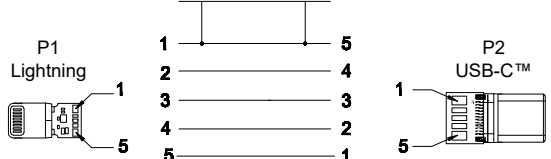


	1	2	3	4	5	6	7	8	9	10	11	12	13	14																						
A	Aderquerschnitt / Wire cross section  - Leiter / Conductor: 51/0.08 TC + 250 D - Isolation / Insulation: PP Ø 1.1 ± 0.05 mm - Aluminium Folie / Aluminium foil - Leiter / Conductor: 11/0.08 TC + 250 D - Isolation / Insulation: HDPE Ø 0.7 ± 0.05 mm - Leiter / Conductor: 11/0.08 TC + 250 D - Isolation / Insulation: HDPE Ø 0.7 ± 0.05 mm - Erdung / Drain: 48 / 0.08TC + 250D * 1C - Aluminium Folie / Aluminium foil - Ø 3.5 ± 0.1 - Kabelgeflecht / Braid: 16/6/0.08TC 10 Meshes/Inch - Mantel / Jacket: TPE Ø 3.5 ± 0.1 mm														A																					
B															B																					
C															C																					
D	Pin-Belegung / Pin assignment 														D																					
E						Dual-USB Auto Schnellladegerät USB-C™ PD (Power Delivery) & Lightning-auf-USB-C™-Lade- und Synchronisationskabel Dual-USB Auto Schnellladegerät Anschlüsse: Zigarettenanzünder-Stecker, USB-C™-PD-(Power Delivery)-Buchse, USB-A-QC3.0-(QuickCharge)-Buchse Eingang: 12-24 V $\overleftarrow{\overrightarrow{}}$ 3,0 A Ausgang USB-A QC3.0: 5 V $\overleftarrow{\overrightarrow{}}$ 3,0 A, 15 W 9 V $\overleftarrow{\overrightarrow{}}$ 2,0 A, 18 W 12 V $\overleftarrow{\overrightarrow{}}$ 1,5 A, 18 W USB-C™ PD: 5 V $\overleftarrow{\overrightarrow{}}$ 3,0 A, 15 W 9 V $\overleftarrow{\overrightarrow{}}$ 3,0 A, 27 W 12 V $\overleftarrow{\overrightarrow{}}$ 2,25 A, 27 W USB-A + USB-C™: 5 V $\overleftarrow{\overrightarrow{}}$ 3,0 A, 15 W Gewicht: 14 g Lightningkabel Anschlüsse: Apple Lightning Stecker (8-Pin), USB-C™-Stecker Knickschutz: beidseitig Kabellänge: 1,0 m Max. Übertragungsrate: 0,48 Gbit/s									Dual-USB Auto Fast Charger USB-C™ PD (Power Delivery) & Lightning to USB-C™ Charging and Sync Cable Dual-USB Auto Fast Charger Connectors: Cigarette lighter plug, USB-C™ PD (Power Delivery) socket, USB-A QC3.0 (QuickCharge) socket Input: 12-24 V $\overleftarrow{\overrightarrow{}}$ 3,0 A Output USB-A QC3.0: 5 V $\overleftarrow{\overrightarrow{}}$ 3,0 A, 15 W 9 V $\overleftarrow{\overrightarrow{}}$ 2,0 A, 18 W 12 V $\overleftarrow{\overrightarrow{}}$ 1,5 A, 18 W USB-C™ PD: 5 V $\overleftarrow{\overrightarrow{}}$ 3,0 A, 15 W 9 V $\overleftarrow{\overrightarrow{}}$ 3,0 A, 27 W 12 V $\overleftarrow{\overrightarrow{}}$ 2,25 A, 27 W USB-A + USB-C™: 5 V $\overleftarrow{\overrightarrow{}}$ 3,0 A, 15 W Weight: 14 g Lightningcable Connection: Apple Lightning male (8-pin), USB-C™ male Kink protection: both sides Cable length: 1.0 m Max. transmission rate: 0.48 Gbit/s									E												
F															F																					
G															G																					
H															H																					
I	Änderungen <table><tr><th>Datum</th><th>Name</th><th>gez.:</th><th>Datum</th><th>Name</th></tr><tr><td></td><td></td><td></td><td>22.01.2024</td><td>ir</td></tr><tr><td></td><td></td><td>gepr.:</td><td>22.01.2024</td><td></td></tr><tr><td></td><td></td><td>Norm:</td><td></td><td></td></tr></table>					Datum	Name	gez.:	Datum	Name				22.01.2024	ir			gepr.:	22.01.2024				Norm:			Bezeichnung KFZ SET Lightning 27W/3,0A USB A/C 1,0m sw PL Zeichnungs-Nr.: 72166									Blatt 1/1 von	I
Datum	Name	gez.:	Datum	Name																																
			22.01.2024	ir																																
		gepr.:	22.01.2024																																	
		Norm:																																		
J															J																					
	1	2	3	4	5	6	7	8	9	10	11	12	13	14																						