


# MAX PLUS EP522

**9V**



## Industry Standard Dimensions

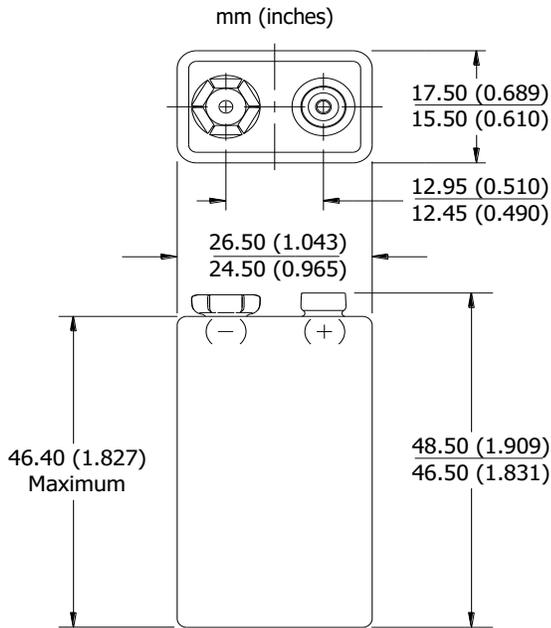


## Specifications

<b>Classification:</b>	Alkaline
<b>Chemical System:</b>	Zinc-Manganese Dioxide (Zn/MnO <sub>2</sub> ) No added mercury or cadmium
<b>Designation:</b>	ANSI 1604A, IEC-6LF22 or 6LR61
<b>Nominal Voltage:</b>	9.0 volts
<b>Operating Temp:</b>	-18°C to 55°C
<b>Typical Weight:</b>	45 grams
<b>Typical Volume:</b>	21 cubic centimeters
<b>Shelf Life:</b>	5 years at 21°C
<b>Terminal:</b>	Miniature Snap

## Continuous Discharge


to 4.8 volts at 21°C

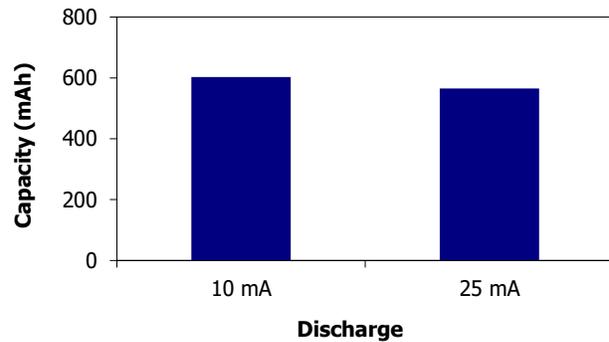

## INDUSTRY STANDARD TOY TEST 270 ohm 1 hr/day



## Battery Selection Indicator

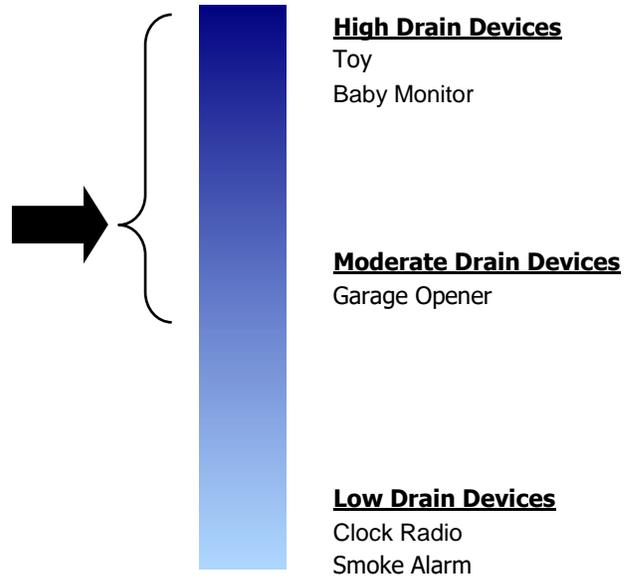

## Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.  
**Contents herein do not constitute a warranty and are for reference only.**