
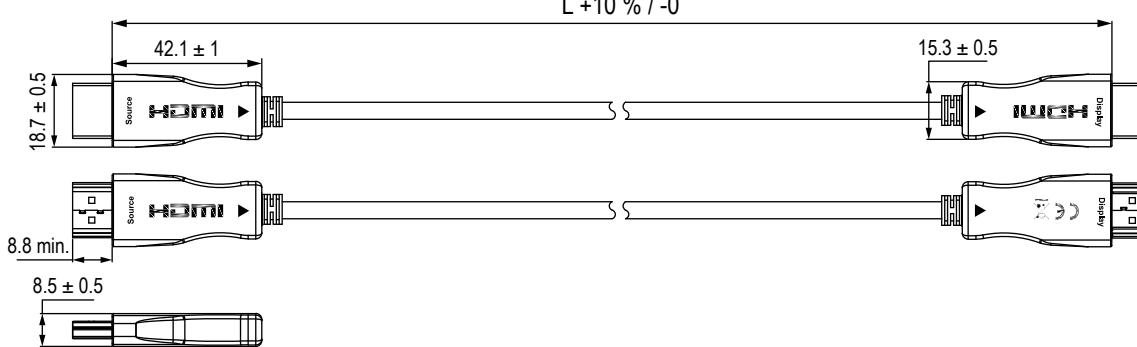


1		2		3		4		5		6		7		8		9		10		11		12		13		14			
A		Art.-Nr. / Item No.		Beschreibung / Description										Länge / Length (L)				A											
		65566		HDMI 2.0 Optical Hybrid Kabel (AOC) 01000 10m sw										10 m															
		65567		HDMI 2.0 Optical Hybrid Kabel (AOC) 02000 20m sw										20 m															
		65568		HDMI 2.0 Optical Hybrid Kabel (AOC) 03000 30m sw										30 m															
		65569		HDMI 2.0 Optical Hybrid Kabel (AOC) 04000 40m sw										40 m															
B		65573		HDMI 2.0 Optical Hybrid Kabel (AOC)10000 100m sw										100 m				B											
				Aderquerschnitt / Wire cross section																									
C																		C											
				Mantel / Jacket: PVC OD 4.8 ± 0.2 mm 4 Kern Multimode-Faser / 4 Core Multimode Fiber: 50/125 µm Füller / Filler Aluminium Folie / Aluminium foil Leiter / Conductor: 7C * 30 AWG (1/0.254 ± 0.008BC) Isolierung / Insulation Erdung / Drain: (1/0.254 ± 0.008BC)														D											
E				Optisches Hybrid High-Speed-HDMI™-Kabel mit Ethernet (AOC) - hochauflösende Signalübertragung mit bis zu 4K @ 60 Hz (2160p) und einer max. Übertragungsrate von bis zu 18 Gbit/s - AOC-Basis (Active Optical Cable) mit einem hybriden Glasfaser-Kupferleiter - vergoldete HDMI™-Stecker - Signalrichtung muss beim Anschluss beachtet werden (unidirektional)										Optical Hybrid High Speed HDMI™ Cable with Ethernet (AOC) - high resolution signal transmission with up to 4K @ 60 Hz (2160p) and a max. transmission rate of up to 18 Gbit/s - AOC cable (Active Optical Cable) with HDMI™ connectors and a hybrid fibre-optic copper conductor - gold-plated HDMI™ connectors - signal direction must be observed when connecting (unidirectional)				E											
F				Anschlüsse: 2x HDMI™-Stecker (Typ A) Max. Auflösung: 4K Ultra HD 2160p (60 Hz) Max. Übertragungsrate: 18 Gbit/s, 6 Gbit/s pro Kanal Signalrichtung: unidirektional Unterstützte Standards: HDR (High Dynamic Range), HDMI™ Ethernet Channel (HEC), 3D, HDCP 2.2, EDID, Consumer Electronics Control (CEC), Enhanced Audio Return Channel (eARC), Audio Return Channel (ARC)										Connection: 2x HDMI™ male (Typ A) Max. resolution: 4K Ultra HD 2160p (60 Hz) Max. transmission rate: 18 Gbit/s, 6 Gbit/s per channel Signal direction: unidirectional Supported standards: HDR (High Dynamic Range), HDMI™ Ethernet Channel (HEC), 3D, HDCP 2.2, EDID, Consumer Electronics Control (CEC), Enhanced Audio Return Channel (eARC), Audio Return Channel (ARC)				F											
G				Betriebstemperatur: 0 °C ~ +50 °C Lagertemperatur: -20 °C ~ +70 °C										Operating temperature: 0 °C ~ +50 °C Storage temperature: -20 °C ~ +70 °C				G											
I		Änderungen				Datum		Name		Bezeichnung										Blatt									
		Datum		Name		gez.: 01.08.2023		anw		HDMI 2.0 Optical Hybrid Kabel (AOC) XXXXX Xm sw										1/1									
						gepr.: 01.08.2023		anw		Zeichnungs-Nr.:										von									
						Norm:																							
						Änderungen vorbehalten / Subject to change																							
J		1		2		3		4		5		6		7		8		9		10		11		12		13		14	